

SunPower® Dual-Tilt Carport (DT)



Superior performance, value and design

SunPower® patented carports are designed by a talented and experienced team of in-house architects and engineers working with your team to reduce energy costs, enhance the value of your real estate and strengthen your commitment to sustainability.

Optimized for functionality and safety

SunPower's dual incline canopy provides high energy production, while safely directing snow and ice to the center of the structure—away from people. It also features a standard 13' 6" minimum drive aisle clearance for open views and vehicle access.

A track record of success

With more than 100 MW of carport installations nationwide, SunPower knows what it takes to meet milestones, keep your project on schedule and minimize any disruption to your organization.



Additional Information

Standard features and specifications


- Snow/ice management
- Clearance at drive aisle: min 13' 6" (412 cm)
- Clearance at column: 12' 6" (381 cm)
- Concrete piers: 2' min. above asphalt
- Carport width: 27' to 41'
- Angles of inclination: 1 to 10 degrees
- Column-to-column spacing: 18' to 36'
- Patented (utility)¹

Optional features

- Water management
- LED lighting
- Branding
- Decking
- EV charging stations
- SunPower® EnergyLink® System Monitoring

Warranties

- | | |
|--|--------------------|
| • SunPower panels, Combined Power and Product Warranty | 25 years |
| • Inverter ² | 10, 15 or 20 years |
| • SunPower carport structure | 20 years |
| • EnergyLink® Monitoring Hardware | 10 years |

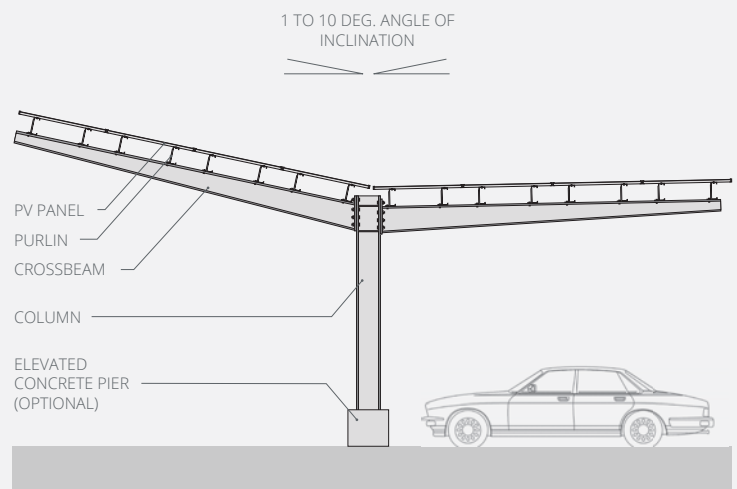

¹ Pat. www.sunpower.com/patents
² Manufacturer pass-through warranty